KAI

Shin Azumi | 2006



KAI

Shin Azumi | 2006

In Japanese "KAI" means shell. And just like a shell that opens and reveals its very soft interior, this chair perfectly adapts to the body. Thanks to a fold in the backrest, it provides support and comfort. With its minimalist design, it has a versatile and strong personality.



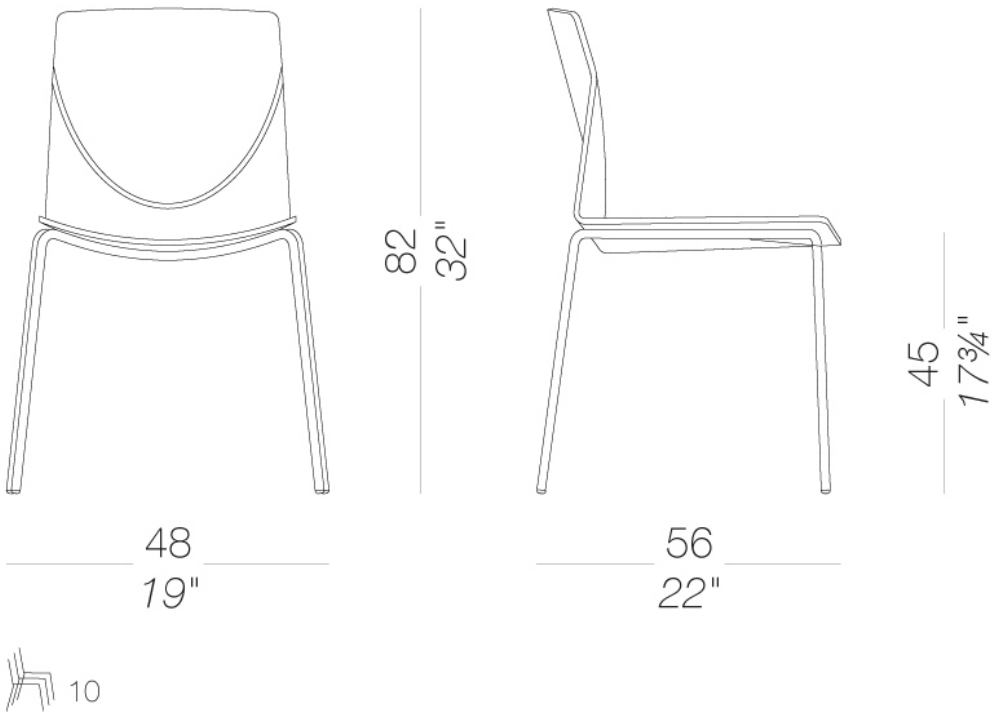
KAI

Shin Azumi | 2006

| S38 stackable chair in wood or fabric

Stackable chair with base in sandblasted stainless steel Aisi 304. The curved plywood seat is available in several finishes, with seat pad in leather on request or fully upholstered in fabric. We suggest to put a protection on the seat pad when stacked. Glides in nylon with felt. It is complemented by a height adjustable swivel stool.

TEST EN 1728:2000 6.7 - UNI 10977/2002 - L4



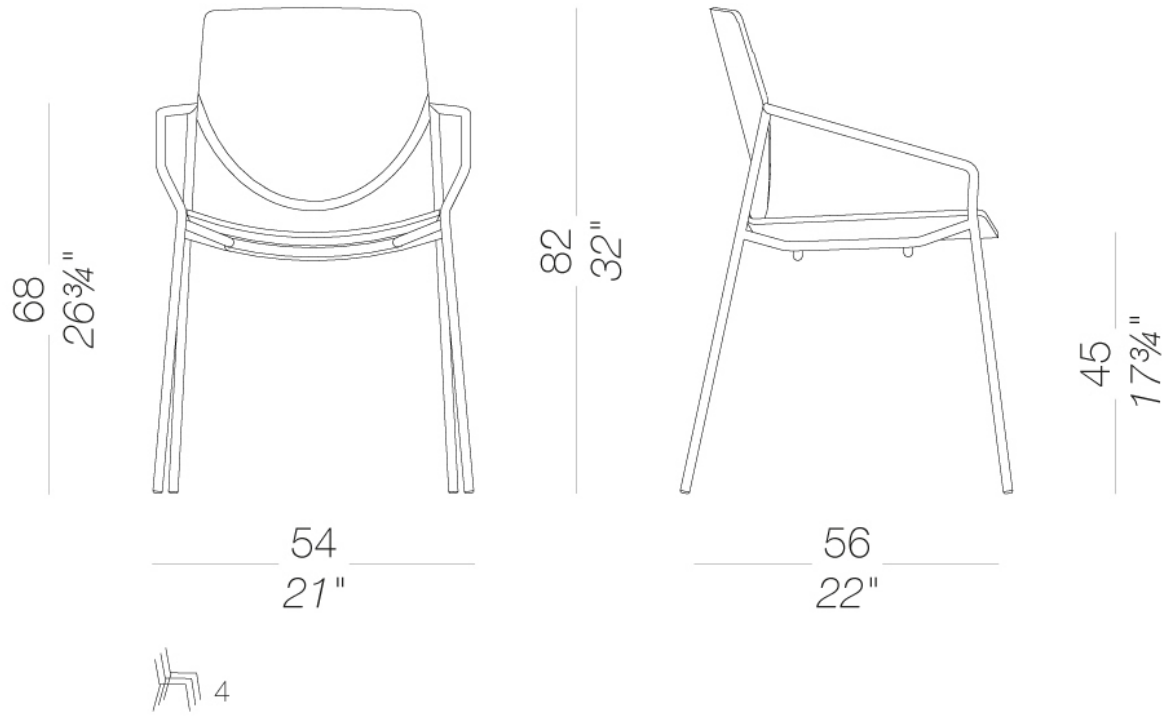
KAI

Shin Azumi | 2006

| S38P stackable chair with armrests

Stackable armchair with base in sandblasted stainless steel Aisi 304. The curved plywood seat is available in several fi nishes, with seat pad in leather on request or totally upholstered in fabric. We suggest to put a protection on the seat pad when stacked. Glides in nylon with felt. It is complemented by a height adjustable swivel stool.

TEST EN 1728:2000 6.7 - UNI 10977/2002 - L4



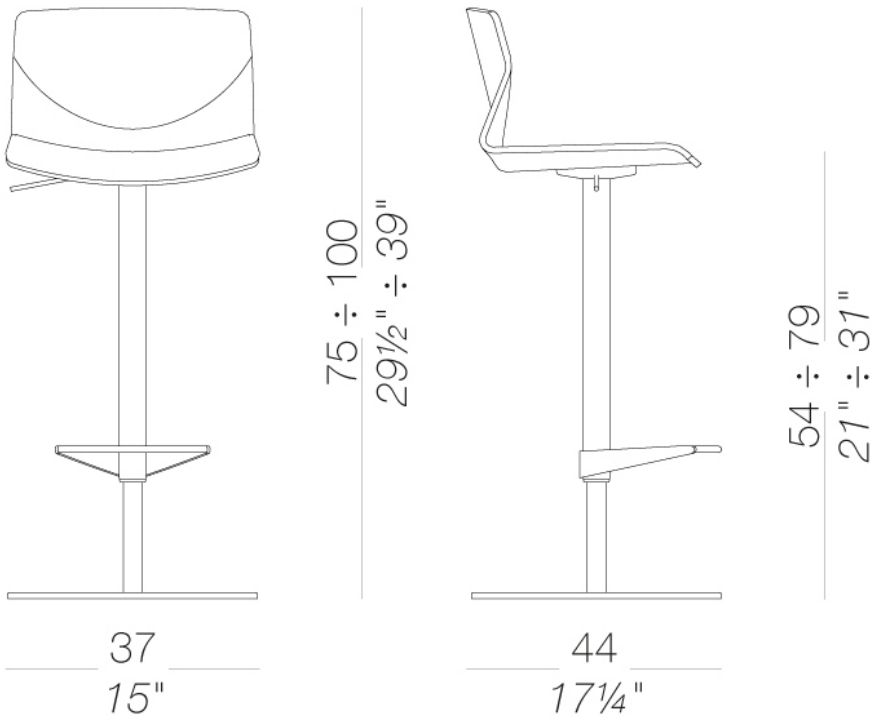
KAI

Shin Azumi | 2006

| S39 height-adjustable bar stool H54 ÷ 79

Stool with swivel seat and adjustable height. Frame in sandblasted stainless steel Aisi 304 and round base in steel with « linen fabric » pattern or completely powder coated white or black. Seat in moulded plywood in several finishes, also with seat-pad in soft-leather or fully upholstered in fabric or leather. Felt under the base.

TEST EN 15373:2007 - EN 15373:2007 - L3 severe
TEST 1 IM - Leather




KAI

Shin Azumi | 2006


upholstery


fabric
Main Line Flax - Grade. B
57 Colors



fabric
Blazer - Grade. C
77 Colors



fabric
Chili - Grade. A
47 Colors


fabric
Umber - Grade. B
36 Colors



fabric
Nobel - Grade. C
30 Colors


fabric
Naveli - Grade. C
24 Colors


fabric
Fiocco - Grade. B
34 Colors


fabric
Atrium - Grade. C
16 Colors


fabric
Panama - Grade. A
48 Colors


fabric
Sorrento - Grade. B
22 Colors


fabric
Hallingdal 65 - Grade C
58 Colors



fabric
Canvas 2 - Grade C
45 Colors


fabric
Steelcut Trio 3 - Grade D
54 Colors



fabric
Fiord 2 - Grade C
39 Colors


fabric
Remix 3 - Grade C
72 Colors


fabric
Divina MD - Grade D
27 Colors



fabric
Divina Melange 3 - Grade D
38 Colors


fabric
Tonica 2 - Grade C
39 Colors



fabric
Maya - Grade A
43 Colors


fabric
Jet - Grade A
66 Colors


fabric
Medley - Grade A
37 Colors


fabric
Capture - Grade B
60 Colors


fabric
Crisp - Grade B
40 Colors


fabric
Ilris - Grade B
34 Colors


fabric
Steelcut 3 - Grade D
40 Colors


ecoleather
Valencia - Grade B
72 Colors


leather
leather
7 Colors

frame



powder coating
black
1 Colors


metal
stainless steel
1 Colors

powder coating
white
1 Colors

shell



wood
blanched oak
1 Colors


wood
black open pore
1 Colors


wood
oak dark walnut
1 Colors

lacquered
white lacquered
1 Colors

cushion


soft-leather
Soft-leather
17 Colors

KAI

Shin Azumi | 2006

consult the porfolio for the range of colors, fabrics, eco-leather, soft-leather.

use and maintenance instructions
Clean all parts in wood, leather, fabric and metal with a damp cloth or a diluted neutral cleaner. Do not use cleaners with alcohol, bleach, solvent or abrasive products. Any liquid spilt on the product must be wiped up immediately.When lifting or moving the product, hold it on the structure and not under the seat. The product should not be subjected to unbalanced weights, as it is designed for a proper rest on the foothold (on four legs or on the base). Our company relieves from any responsibility in case of damage caused to fragile floors. Avoid any improper use of the product: do not step on the product, on the footrest or on the armrests. Avoid any movements that could compromise the proper functionality of the product or the safety of the users.Wood and leather, being natural materials, could be easily damaged. Small impurities or imperfections are within quality standard range.Do not expose the product to weather conditions or atmospheric agents, nor to heat sources over 40°C. Also products for outdoor use could be afflicted by atmospheric agents. The product could undergo possible exterior changes due to particular exposure to heat, humidity and saltiness. An appropriate and frequent maintenance and cleaning of the product enhances its durability. The product could change colour and shade, if exposed to direct sunlight. Maintenance has to be carried out by experienced staff. Dispose of the package only after assembling the product, in order to avoid the loss of ironmongery and components. Once the product has been dismantled, the product itself or its components must be given to the public garbage disposal system, according to the legislation in force.